



KODAK

USB-C Hub (6-IN-1&PD)

T342

Specification





KODAK USB-C Hub (6-IN-1&PD) Model: T342

T342 is a multifunctional six in one USB-C docking station, equipped with 1 USB3.0 interface, 1 USB2.0 interface, 1 USB-C PD charging interface, 1 HDMI high-definition interface, 1 SD and 1 TF card slot.

Mainly used as a USB-C interface for laptops, tablets, or mobile phones to solve the problem of insufficient interfaces and meet the interface requirements of users in different application scenarios such as business, office, learning, and entertainment.

High quality main control chips and converters are used internally, and the aluminum shell of the body is anodized in gray color. The surface is sandblasted with a delicate and durable feel, and has strong heat dissipation.

The wire is made of PVC material, which is soft, strong, and resistant to breakage. It uses multiple thick tinned copper cores inside, as well as multiple layers of shielding such as braided mesh and tin foil shielding layers. It has strong anti-interference ability, more stable transmission, and can be used under load for a long time.

1. Product specifications

- **Interface**
 - Input Port : Type-C 5V==3A(Max)
 - Output Port : USB 3.0 +USB 2.0+Type C 3.0 charge +SD2.0+TF 2.0+HDMI
- **USB-C PLUG**
 - Support Thunderbolt 3/ 4, USB4, USB-C DATA;
- **HDMI**
 - Support HDMI 1.4 3840*2160 @ 30HZ,
 - Support both HDCP1.4 and HDCP2.3
- **USB3.0**
 - USB3.0: Support 5Gbps;
- **USB2.0**
 - USB2.0: Support 480Mbps;
- **SD/Micro SD Card**
 - SD: Support 25MB/s;
 - Micro SD: Support 25MB/s;
 - SD cards and Micro SD cards cannot work at the same time
- **USB-C CHARGE AND DATA**
 - Support PD3.0 100W
 - Support USB2.0
- **Size**
 - 119.5x32x12.4mm
- **Temperature Range**
 - Operation: 0°C ~ 70°C
 - Storage: -25°C ~ 85°C
- **Certification**
 - CE
 - FCC
 - RoHS
- **Operating System compatibility**
 - Support Windows XP and later version
 - Support MAC OS 10.8 and later version
 - Support IOS 14 and later version
 - Support Android 8 and later version



2. Product Performance


Output Port	Transmission rate (MAX)	Actual reference value
USB3.0-A	5Gbps	Write: >70MB/s Read: >90MB/s
USB2.0-A	480Mbps	Write: >30MB/s Read: >35MB/s
SD / Micro SD 2.0	25MB/s	Write: >20MB/s Read: >25MB/s
USB3.0-Type C (PD)	PD3.0 100W	
HDMI	HDMI 1.4 3840*2160 @ 30HZ	

Tips:

- The Type C output interface is only for PD power supply, No data transmission function.
- SD/Micro SD 2.0 cannot be used at the same time .



3. Product design rendering

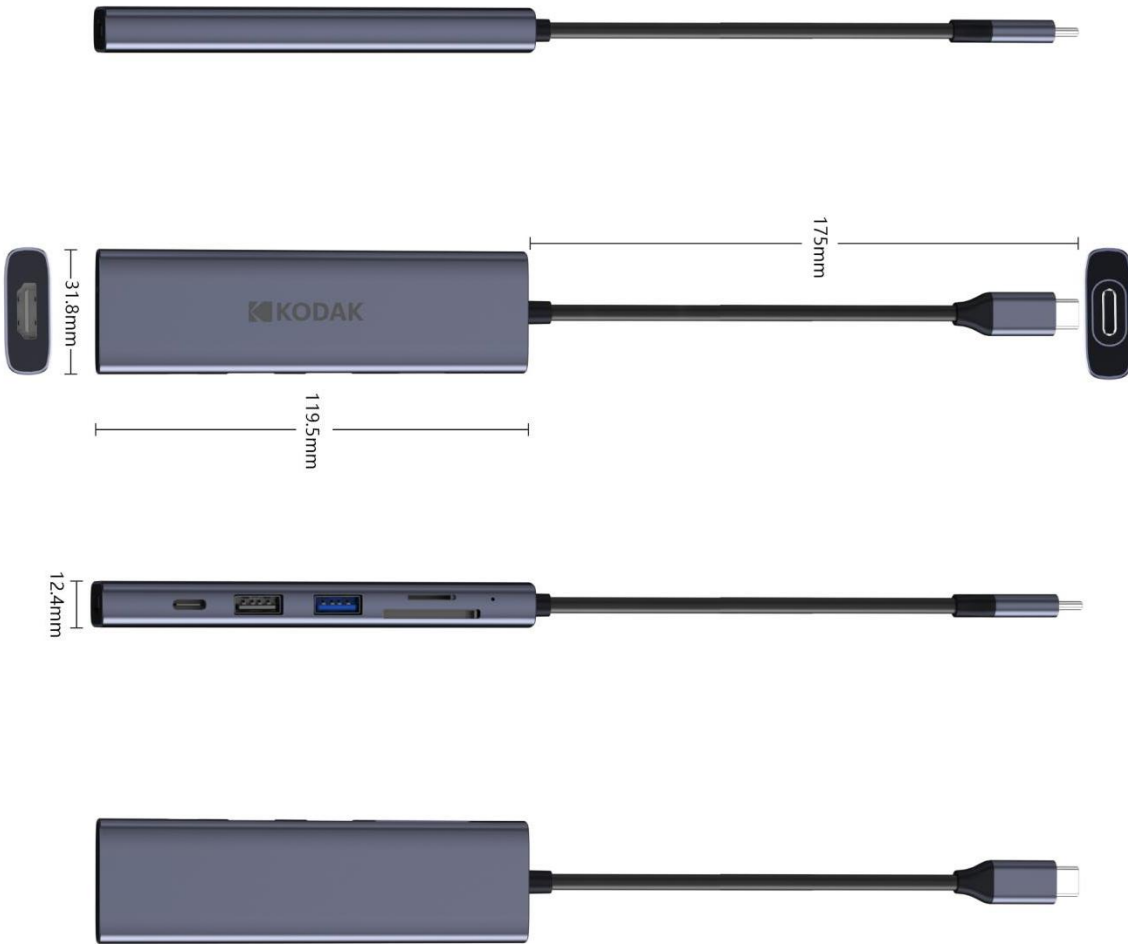



4. Product packaging

